

FILTRI A Y FLANGIATI IN GHISA






Corpo: Ghisa GG25

Guarnizione: PTFE

Filtro: Acciaio inox AISI304

Conessioni: Flangiate Pressione nominale: 10/16 bar

Temperatura max. di esercizio: 120°C

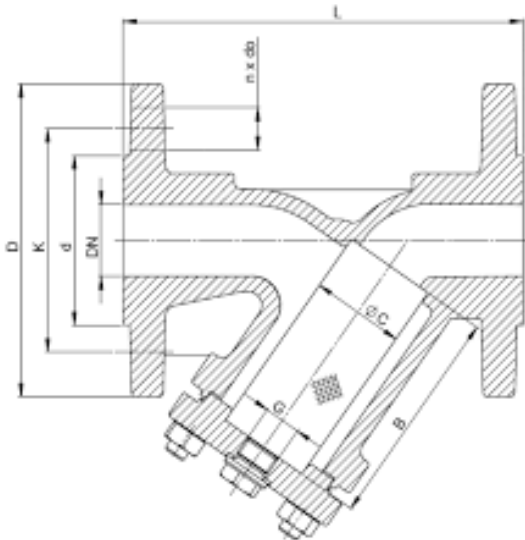

DN	L	KG
	mm	
15	130	2,5
20	150	3,2
25	160	3,9
32	180	5,4
40	200	6,9
50	230	9,1
65	290	11,5
80	310	15
100	350	23
125	400	32,5
150	480	47,5
200	600	101,5

