


 **Valico**

POMPE
POMPE A MEMBRANA
ELETTROPOMPE CENTRIFUGHE







MODELLO AS

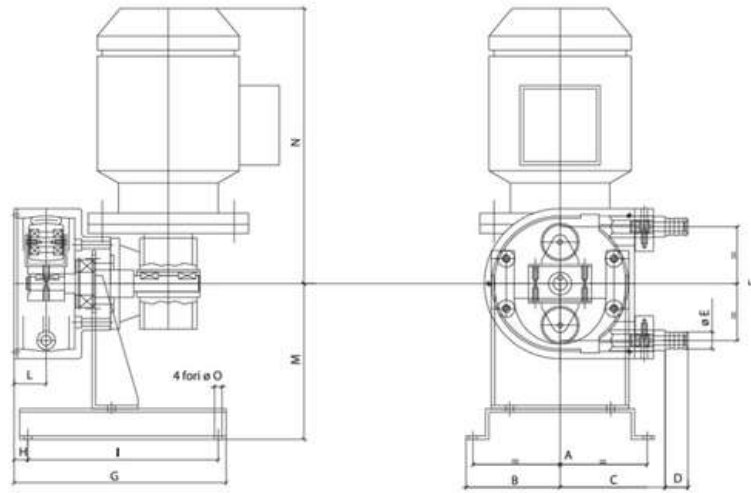


OVERALL DIMENSIONS

TYPE	A	B	C	D	E	F	G	H	I	L	M	N	oO	Kg.
AS 10 FX	172	92	92	20	15	104	185	12	166	28	137	245	7	9
AS 15 FX	172	92	110	20	20	127	183	12	166	30	137	245	7	10
AS 20 FX	210	112	142	35	25	175	248	18	220	40	184	260	7	18
AS 25 FX	250	146	210	45	32	254	386	81	290	52	228	370	11	40

PERFORMANCE CURVES

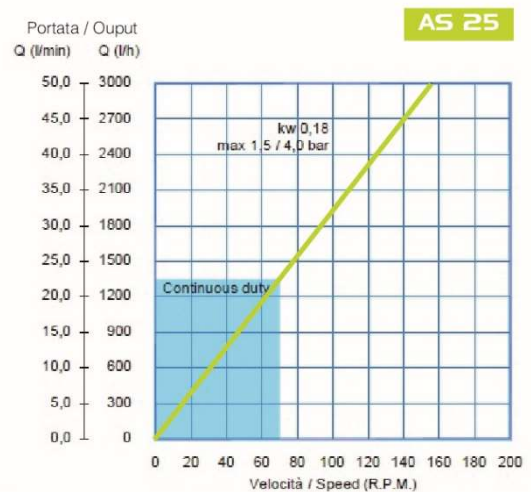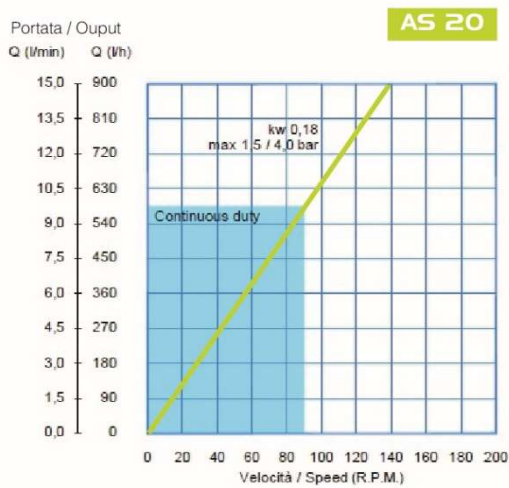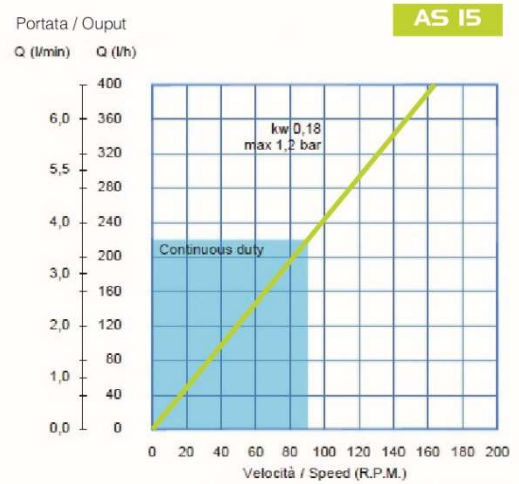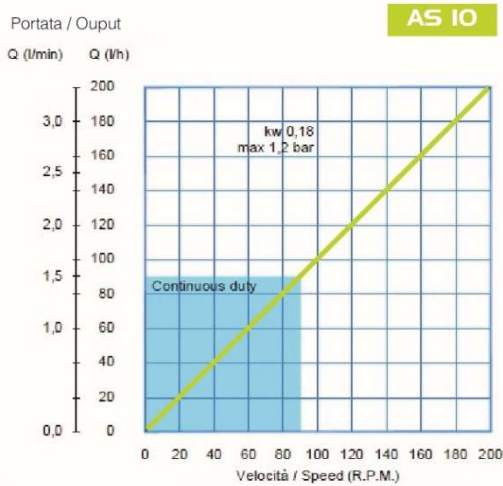

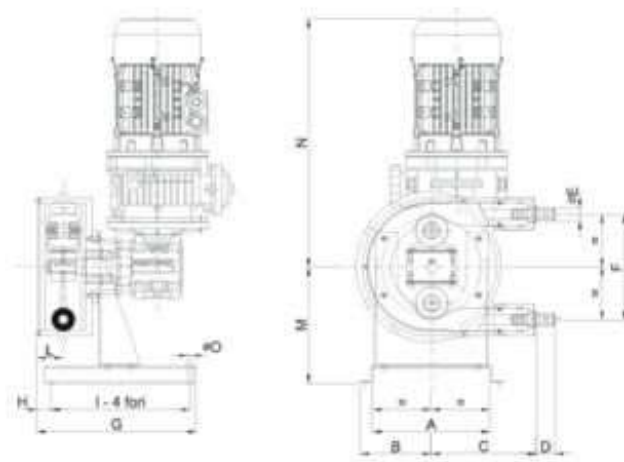

DIMENSIONS

TYPE	A	B	C	D	E	F	G	H	I	L	M	N	oO	Kg.
ASP 10 VX	210	112	166	25	15	167	251	21	220	40	184	260	7	20
ASP 15 VX	210	112	166	30	20	167	251	21	220	40	184	260	7	20
ASP 25/15 VX	250	170	224	45	20	240	640	75	400	52	228	170	11	50
ASP 25 VX	250	170	224	45	32	240	640	75	400	52	228	170	11	50
ASP 32 VX	330	217	290	66	40	314	735	114	520	68	300	217	11	90
ASP 40 VX	420	270	340	70	50	398	884	130	580	74	370	270	14	120
ASP 50 VX	420	330	380	80	65	512	1017	158	650	88	440	330	14	180
ASP 65 VX	566	440	510	91	80	672	1385	142	930	106	570	440	17	430

TECHNICAL CHARACTERISTICS


TYPE	Q(L/H)	A	P	RPM	I	KW	di	Qu	Nm
ASP 10 VX	9÷65	8	100/80	4,5÷32	60	0,25	10	0,034	35
	19÷130	8	100/60	9,3÷65	40	0,37			
	28,5÷200	8	100/50	14÷98	20	0,37			
	143								
ASP 15 VX	20÷142	8	100/80	4,5÷32	60	0,25	15	0,074	35
	41,3÷289	8	100/60	9,3÷65	30	0,37			
	62÷435	8	100/50	14÷98	20	0,37			
ASP 25/15 VX	55÷385	8	100/80	7÷49	40	0,75	15	0,131	40
	71÷495	8	100/60	9÷63	31,5	0,75			
	110÷870	8	100/50	14÷98	20	0,75			
ASP 25 VX	134÷940	8	100/80	7÷49	40	0,75	25	0,32	40
	173÷1210	8	100/60	9÷63	31,5	0,75			
	110÷870	8	100/50	14÷98	20	0,75			
ASP 32 VX	294÷2058	8	100/80	7÷42	46	1,5	32	0,70	75
	390÷2730	8	100/60	9÷65	30	1,5			
	588÷4116	8	100/40	14÷98	20	1,5			
ASP 40 VX	408÷2856	8	100/80	5÷35	56	1,5	40	1,36	110
	734÷5140	8	100/50	9÷63	3,15	2,2			
	938÷6528	8	100/40	11,6÷80	24,5	2,2			
ASP 50 VX	837÷5860	8	100/80	5÷35	56	2,2	50	2,79	200
	1507÷10546	8	100/50	9÷63	3,15	3			
	1925÷13395	8	100/40	11,6÷80	24,5	4			
ASP 65 VX	1720÷12090	8	100/80	4,4÷31	63	5,5	65	6,50	400
	2730÷19110	8	100/50	7÷49	40	7,5			
	3510÷24570	8	100/40	9÷63	31,5	7,5			

MOTOR 3 PH - VOLTS 230/400 HZ 50 R.P.M. 1400 IP55


*= according to hose compound

PERFORMANCE CURVES


ASP 10

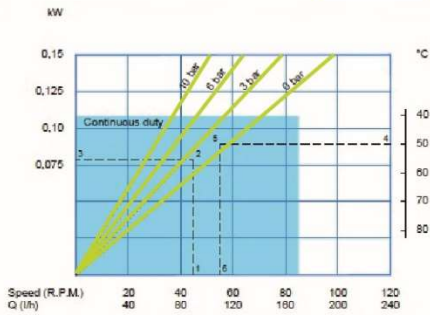


ASP 15

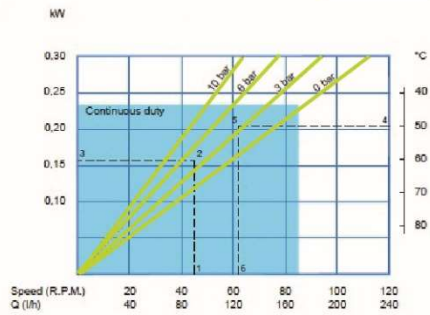


ASP 25/15

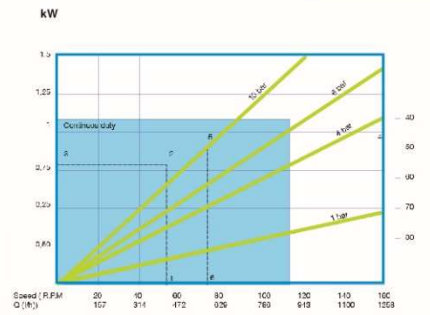


ASP 25

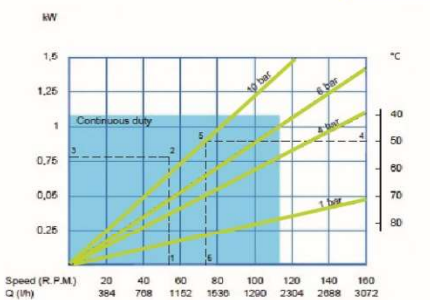


ASP 32

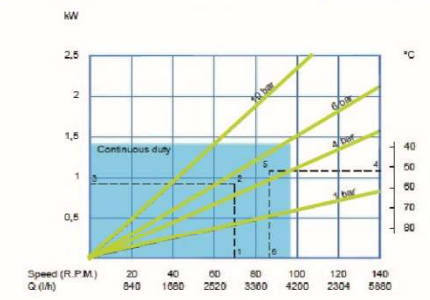


ASP 40

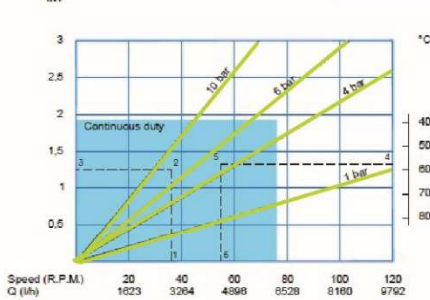

ASP 50

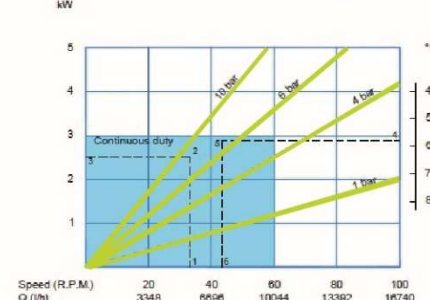

ASP 65

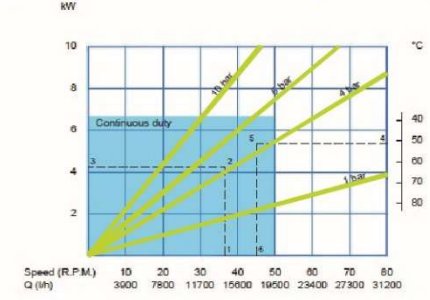

HOW TO USE THE CURVES

- Flow required indicates pump speed
 - Calculated discharge pressure
 - Net motor power required
 - Fluid temperature
 - Calculated discharge pressure
 - Maximum recommended pump speed
- The operating data here described refer to water or similar peculiarity fluid